

Modular NXE



elektrická / electric

Technická charakteristika / Technical characteristics



TYP / TYPE	Kw	Kcal/h	Počet fáz / Phases	V	A	Hz	Objem / Volume dm ³
MODUL NXE-20 DECK NXE-20	9,4	8.100	3N~	230/ 400	25,9 / 14,9	50/60	234
MODUL NXE-20 +V DECK NXE-20 +V	10,8	8.100	3N~	230/400	29,4 / 16,9	50/60	234
MODUL NXEP-20 +V DECK NXEP-20 +V	10,8	8.100	3N~	230/ 400	29,4 / 16,9	50/60	234
MODUL NXE-30 DECK NXE-30	12,3	10.600	3N~	400	18,6	50/60	390
MODUL NXE-30 +V DECK NXE-30 +V	13,7	10.600	3N~	400	20,6	50/60	390
KYSIAREŇ NXE + H PROOFER NXE+H	2,2	1800	1N~	230	10	50 / 60	3.542

Rozmery / Dimensions

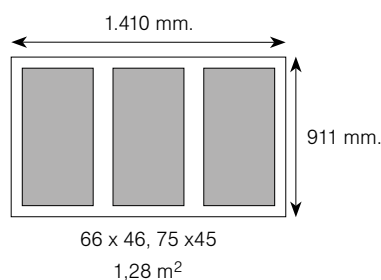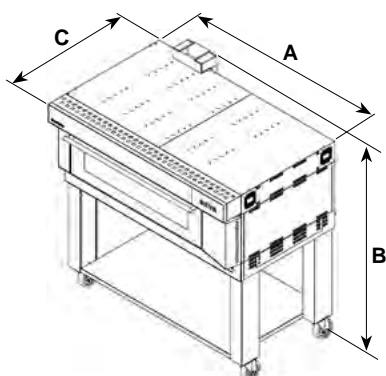

"Cukrárenské" dvere . Otváranie smerom nadol a von.

Downward & outward opening module

NXE / NXEP	A mm	B mm	C mm	Hmotnosť / Weight Kg	Kapacita / počet plechov
MODUL NXE-20 DECK NXE-20	1.912	315	1.316	229	3 (76 X 46)
MODUL NXE-20 S FUNKCIOU PARA DECK NXE-20 +V	1.912	315	1.316 (*)	284	3 (76 X 46)
MODUL PARA NXEP-20 DECK NXEP-20 +V	1.912	315	1.364 (*)	293	3 (76 X 46)
MODUL NXE-30 DECK NXE-30	1.912	415	1.316	276	3 (76 X 46)
MODUL NXE-30 PARA DECK NXE-30 +V	1.912	415	1.316	323	3 (76 X 46)
KYSIAREŇ NXE + H PROOFER NXE +H	1.912	704	1.167	150	3 (76 X 46) X 5 Úrovne / Levels
ZÁKLADNÁ DOSKA NXE BASE NXE	1.912	150	1.167	83	-
VRCHNÁ DOSKA NXE/NXEP TOP NXE/NXEP	1.912	165	1.331	57	-

(*) Celkovú hĺbku treba zväčšiť o min 23 mm pre odpadové trubky (*) The depth should be increase in 23 millimetres for the pipes of outlet